

SHG PUR-Profile GmbH • Wecostraße 3 • 53783 Eitorf

Technical Datasheet
Knuffi® WALL PROTECTION KIT Type A+



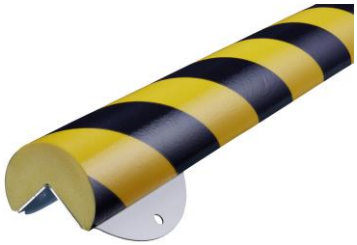

The Wall Protection Kit can be bolted onto various surfaces thanks to its stainless steel backing, making it extremely versatile. At the same time, the flexible polyurethane foam absorbs even the hardest impacts thanks to its elastic characteristics and warns of potential hazards at edges, protrusions and obstacles with its warning markings.

Profil Body	Polyurethane foam fixed on stainless steel
Surface	Polyurethane foam colored by reverse printing and fixed in place by foaming so that no paint appears on outside
Temperature Resistance	From -40 ° C to 100 °C
Classification	Fire Testing DIN EN-13501-1 / class E REACH 1907/2006 (33) & (67) RoHS 2011/65/EU & 2015/863 UV Test: ISO 4892-3
Color	Yellow-Black according to ASR A1.3; Neon-Black; Yellow-Black reflective, Red-White reflective, Black
Standard length	Yellow/black = 0,5m & 1m Neon/black = 0,5m & 1m Reflective Yellow/black = 1m Reflective Red-White= 1m Black= 1m
Installation	The Wall Protection Kit can be installed using the fastening materials supplied (i.e. screws and rawlplugs).
Weight ca.	0,5 meter = 0,80kg 1 meter = 1,6 kg
Shore Hardness	Shore A = ca. 50